

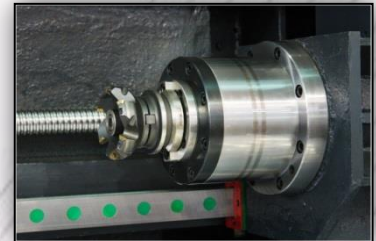


# MD Serie

## Compound Deep Hole Drilling & Milling Center

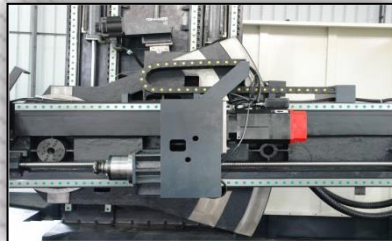

Column movable  
 Table load max. 10.000 kg  
 Deep Drilling Unit Swiveling  
 by CNC control  
 Angle – 25 ~ + 15°  
 Tool Clamping in Spindle  
 BT50

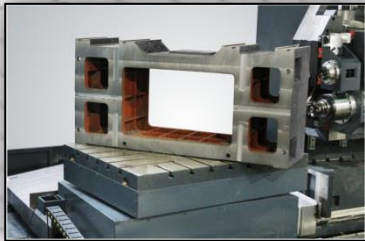

### Specifications

Machine type		MD600	MD1100	MD1600	MD1600H	MD2000
Drilling diameter	mm	3 – 30	3 – 30	3 – 30	3 – 38	5-65
Max. Drilling Depth	mm	600	1.100	1.600	1.600	2.000
Milling capacity	cm <sup>3</sup> /min	150	150	150	300	350
Table loading	kg	2.000	5.000	10.000	15.000	30.000
X-Axis Table cross Travel	mm	1.000	1.300	2.000	2.500	3.000
Y-Axis Table vertical Travel	mm	800	1.200	1.200	1.200	1.550
W-Axis (Turm)	mm	500	700	750	750	1.100
A-Axis (Spindel)	°	- 25 bis + 15	- 25 bis + 15	- 25 bis + 15	- 25 bis + 15	- 25 bis + 15
B-Axis (Table)	°	360	360	360	360	360
CNC Control		Syntec 10B / Option: Siemens / Fanuc				